




# UGY440VS

## UNIVPOWER SILENT SERIES

### POWER OUTPUT

Prime Rating — 321kW (401 kVA)  
 Standby Rating — 353 kW (438 kVA)  
 3-Phase, 60 Hertz, 0.8 PF

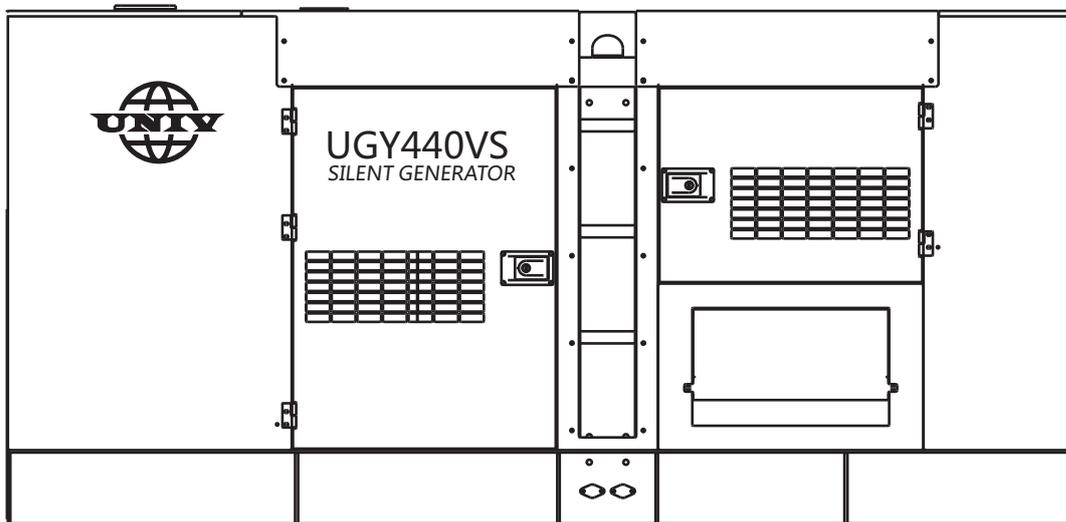

### STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
  - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
  - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to  $\pm 0.25\%$ .
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 80dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel  
 E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
  - High visibility LCD display with heated screen and alphanumeric readout.
  - IP65 Protection standard, operational temperature range of -40° to 85° C.
  - Modbus interface for gauge panel and expansion options.
  - DPF cleaningcycle indication.
  - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

### UNIVPOWER SILENT SERIES

**UNIV POWER DECIBELLEVELS**


Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets good for home, construction sites, residential, hospital, etc.

90	— Subway / truck traffic
80	— Average city traffic
70	— Inside car at 60 mph
60	— Air conditioner at 6m
50	— Normal conversation

→ UNIVGenset at 7m

**80.0**  
DECIBELS

### GENERATOR OUTPUT PANEL

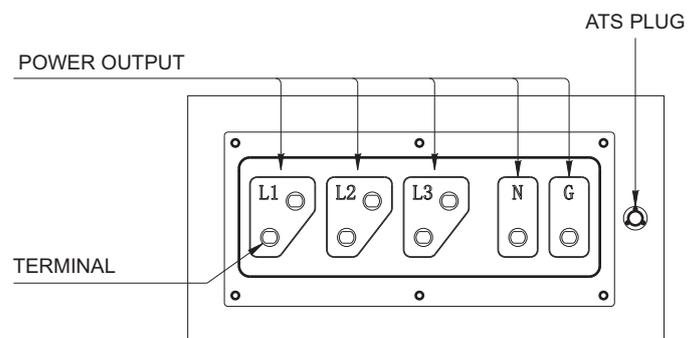



# UGY440VS

## UNIVPOWER SILENT SERIES

### SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Armature Connection	Star with Neutral
Phase	3
Standby Output	353KW (438 KVA)
Prime Output	321KW (401 KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
Generator RPM	1800
Frequency	60 Hz
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	80

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 127/220	1244 Amps
3Ø Volt 254/440	622 Amps
Main Line Circuit Breaker Rating	630 Amps
Over Current Relay Trip Set Point 440V Mode Only	693 Amps

Fuel System	
Fuel Tank Capacity	13.2 gallons (500 liters)
Fuel Consumption	L / h
At full load	77.0
At 3/4 load	57.5
At 1/2 load	39.6
At 1/4 load	22.7

Control system	
Controller Brand	Deepsea
Model	DSE4520
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	USB

Engine Specifications	
Make / Model	VOLVO / TAD1342GE
Emissions	EU II
Starting System	Electric
Design	4-cycle, water cooled, direct injection, natural intake
Displacement	12.78 liters
No. cylinders	6
Bore x Stroke	131 x 158 mm
Gross Engine Power Output	513 hp (377 kW)
Compression Ratio	18.1 : 1
Engine Speed	1800 rpm
Overspeed Limit	2070 rpm
Oil Capacity	9.52 Gallons (36 liters)
Battery	24V 100Ah x 2

Alternator	
Alternator Brand	Stamford/Mecc alte
Alternator Model	S4L1D-E/ECO38 3L4A
Excitation	Brushless, Self-Excited system
Capacity(KVA)	432kva
Power(KW)	346kw
Efficiency(%)	90%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR

### WARRANTY\*

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



### NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




# UGY440VS

## UNIVPOWER SILENT SERIES

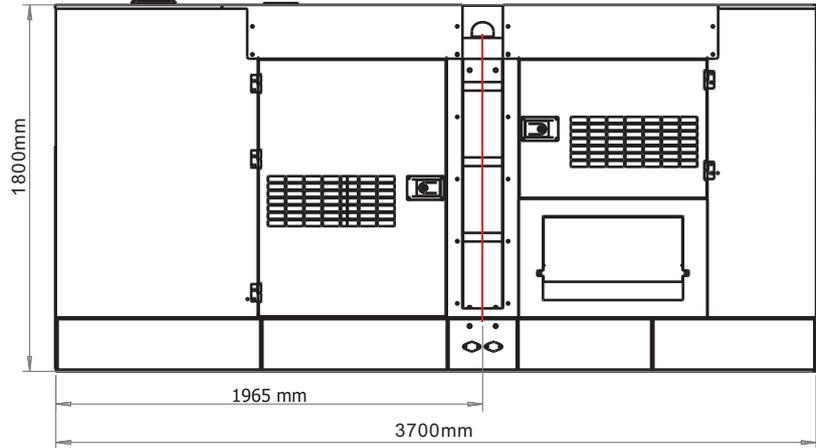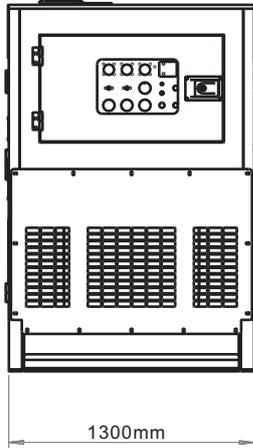

Weight	
Dry Weight	1,204 lbs. (2,650 kg)
Wet Weight	1,336 lbs. (2,940 kg)
Max. Lifting Point capacity	2,663 lbs. (5,860 kg)

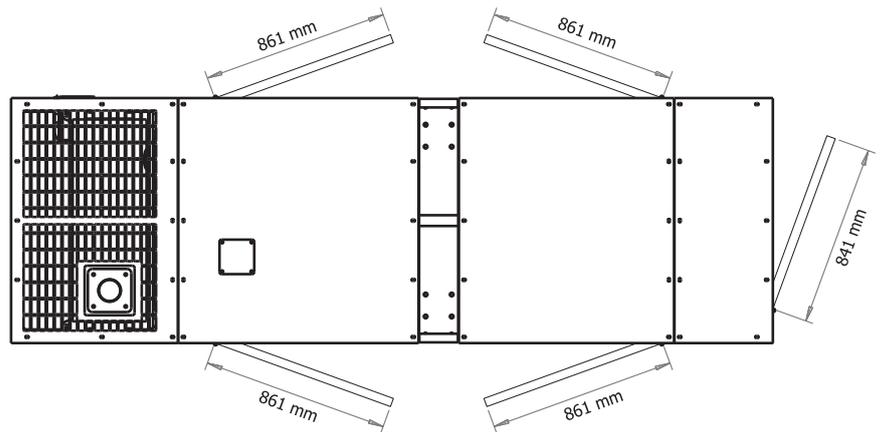

Manufactured by  
**Zhejiang Universal Machinery Co.,Ltd**  
Add:No 18-9 Nanshan Road, Qujiang Zone,  
Quzhou city, Zhejiang Province, CN  
Tel:0086-570-3377022/3377023  
Fax:0086-570-3377086  
Website:www.univpower.com